


- **Rettbox®: power supply**
- **Rettbox®-air: power and compressed air supply**
- **Silver-nickel butt contacts – not affected by oxidation**
- **Automatic ejection brought about by an electric lifting magnet 12 V / 24 V**
- **Loading box with protective insulation**
- **Sliding lid and socket cover close automatically**
- **Compact design, the unit is supplied pre-wired**
- **2 to 6 contacts, auxiliary contacts as an option**
- **Load control light as an option**

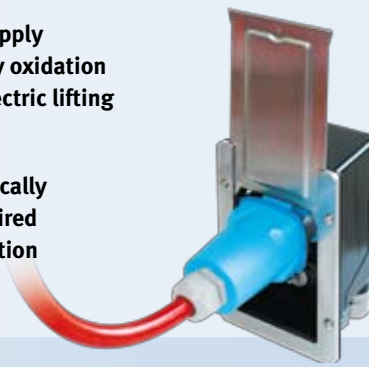


Rettbox®/Rettbox®-air

for rescue and fire brigade vehicles

Automatic ejection of the connector upon start-up of the vehicle

20 A / 32 A

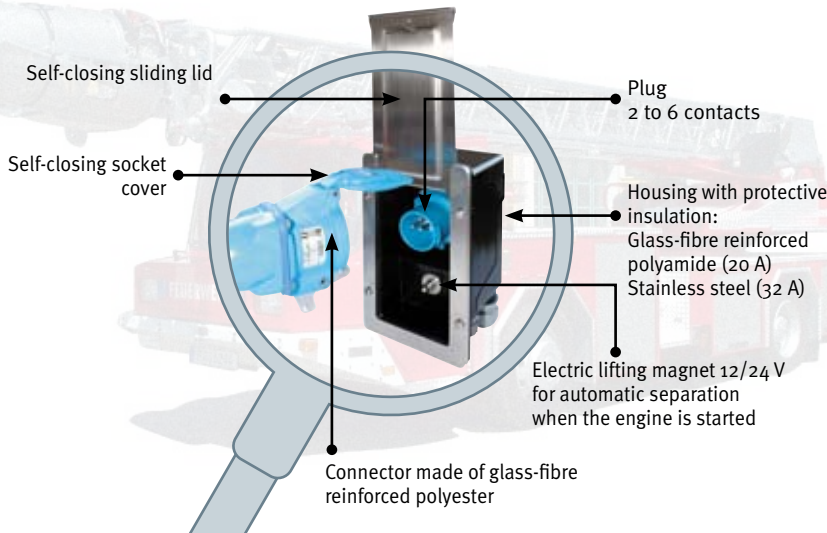


Automatic ejection of the connector when the vehicle is started up

Power
or
Power and compressed air

Rettbox®



Rettbox®-air



Compressed air
Power and compressed air in one supply line



Rettbox®

	Power Supply A – V	Lifting magnet V	Contacts	Part N°
Loading Box pre-wired 	20 A – 12 V	12 V	+/-	61 16059 RKX 12U (*)
	20 A – 24 V	24 V	+/-	61 16089 RKX 24U (*)
	20 A – 230 V	12 V	1P + N + E	61 16015 RKX 12U (*)
	20 A – 230 V	24 V	1P + N + E	61 16015 RKX 24U (*)
	20 A – 230 V	12 V	1P + N + E + 2 aux.	61 16175 RKX 12U (*)
	20 A – 230 V	24 V	1P + N + E + 2 aux.	61 16175 RKX 24U (*)
	20 A – 400 V	12 V	3P + N + E	61 16017 RKX 12U (*)
	20 A – 400 V	24 V	3P + N + E	61 16017 RKX 24U (*)

(*) Replace X with the appropriate suffix (1-9) that represents the required length of cable (1 m - 9 m).


Connector Rettbox®
pre-wired, cable 4 m included



20 A – 12 V	+/-	61 13059 RK4 L (*)
20 A – 24 V	+/-	61 13089 RK4 L (*)
20 A – 230 V	1P + N + E	61 13015 RK4 L (*)
20 A – 230 V	1P + N + E + 2 aux.	61 13175 RK4 L (*)
20 A – 400 V	3P + N + E	61 13017 RK4 L (*)

(*) RK4 = cable 4 m. Replace "4" if another length of cable is required: e.g. RK5 = 5 m

Rettbox®-air

	Power Supply A – V	Lifting magnet V	Contacts	Compressed air	Part N°
Loading Box pre-wired (power and compressed air) 	20 A – 12 V	12 V	+/-	13 bar	61 16059 AKX 12U (*)
	20 A – 24 V	24 V	+/-	13 bar	61 16089 AKX 24U (*)
	20 A – 230 V	12 V	1P + N + E	13 bar	61 16015 AKX 12U (*)
	20 A – 230 V	24 V	1P + N + E	13 bar	61 16015 AKX 24U (*)
	32 A – 230 V	24 V	1P + N + E + 3 aux.	13 bar	38 16187 AKX 24U (*)
	32 A – 400 V	24 V	3P + N + E + 1 aux.	13 bar	38 16247 AKX 24U (*)

(*) Replace X with the appropriate suffix (1-9) that represents the required length of cable (1 m - 9 m).

Connector Rettbox®-air
supply line 4 m included,
power and compressed air
in one cable



20 A – 12 V	+/-	61 13059 AK4 L (*)
20 A – 24 V	+/-	61 13089 AK4 L (*)
20 A – 230 V	1P + N + E	61 13015 AK4 L (*)
32 A – 230 V	1P + N + E + 3 aux.	38 13187 AK4 L (*)
32 A – 400 V	3P + N + E + 1 aux.	38 13247 AK4 L (*)

(*) AK4 = cable 4 m. Replace "4" if another length of cable is required: e.g. AK5 = 5 m

Ceiling suspension device
made of stainless steel



with cable gland for Rettbox® 20 A
with cable gland for Rettbox®-air 20 A
with cable gland for Rettbox®-air 32 A

Part N°

61 1AHUT RRR L
61 1AHUT AAA L
38 1AHUT AAA L

Dimensions

	Rettbox®/Rettbox®-air 20 A	Rettbox®-air 32 A
Installation dimensions:	83 x 163 x 94 mm (W x H x D)	103 x 173 x 145 mm (W x H x D)
Outer frame:	107 x 180 mm (W x H)	123 x 188 mm (W x H)
Height with lid slid out:	318 mm	357 mm
Weight without connector:	1200 g	3200 g